



**RemotePro®**

# DATA SHEET

## Outdoor Remote Power Systems

### Features

- Complete Remote Power Solution for Off-Grid operation
- Weatherproof, UV resistant, outdoor enclosures
- Enclosures can be Wall or Pole Mounted
- High Performance Valve Regulated Sealed Lead Acid Batteries
- Advanced battery charge controller protects against overcharge and over discharge

### Applications

- Wireless Base Stations and Clients
- Surveillance Cameras
- Wireless Bridge and Repeaters
- Remote Sensors
- Remote Lighting
- Backup Power Systems

### Description

The RemotePro® series outdoor power systems are designed for applications that require a primary off-grid power source to run various electronics. The sealed and weatherproof enclosures have extra space available inside for customer electronics.

All enclosures are hinged and gasket sealed. The PL enclosure can accept a padlock or tamper seal. The ST enclosure is equipped with 2 tamper proof closures that are operated by a special key (included).

The enclosures can be mounted to a wall or pole with the included mounting bracket system.

The high quality solar panels have a 25year power output guarantee. The 5W and 10W solar panels are mounted directly to the DC enclosure saving space and making a more convenient assembly. The larger solar panels can be mounted to a 51mm to 101mm (2" to 4") diameter pole or alternately to a wall with the included bracket kit.

Features include an advanced battery charge controller to protect against over-charging or over-discharging of the valve regulated sealed lead acid batteries. Most of the PL and ST systems include a controller with built in POE inserter and DCDC converter to supply up to 48V PoE from the 12V battery system. Enclosures have multiple ports for CAT5 cable, antenna cables/connectors or other cabling. They are vented to prevent residual buildup of hydrogen gas.

Batteries in the DC and PL enclosures are an Advance Glass Matt (AGM) type which have good all temperature performance. The ST enclosure uses a high performance GEL battery which gives the best available deep discharge and temperature performance.



RemotePro®  
PL Series

RemotePro® DC  
Series



RemotePro®  
ST Series

## Specifications


	RPDC12-9-05	RPDC12-9-10	RPPL12xx-36-30	RPPL24xx-18-30	RPST12xx-100-70	RPST12xx-100-140	RPST24xx-50-140	RPST24xx-100-280	RPST12-200-280	RPST24-100-280
<b>Rated Power Generation</b>	1.25W	2.5W	8W	8W	17W	25W	25W	50W	50W	50W
<b>Reserve Time @ Rated Power</b>	40hrs	21hrs	27hrs	27hrs	35hrs	24hrs	24hrs	24hrs	24hrs	24hrs
<b>POE Output Voltage (DC)</b>	No POE Out		12V1A 18V1.7A 24V1.2A 48V.62A	24V 1A 48V .62A	12V1A 18V1.7A 24V1.2A 48V.62A	12V1A 18V1.7A 24V1.2A 48V.62A	24V 1A 48V .62A		No POE Out	
<b>Secondary Volts Out (DC)</b>	12V 20A		12V 1.5A	24V 1.5A	12V 1.5A	12V 1.5A	24V 1.5A		12V 20A	24V 20A
<b>Battery Capacity (Amp Hrs)</b>	9Ah		36Ah	18Ah	102Ah	102Ah	51Ah	102Ah	204Ah	102Ah
<b>Battery Voltage (DC)</b>	12V			24V	12V	12V	24V		12V	24V
<b>Battery Type</b>	Valve Regulated Sealed Lead Acid / Absorbent Glass Mat (AGM)				Valve Regulated Sealed Lead Acid GEL					
<b>Battery Life</b>	5 Years									
<b>Controller Type</b>	PWM		Dual Input: Solar/POE, Dual Output: Battery Voltage/POE with DCDC Converter					PWM		
<b>Overcharge Protection</b>	14.4V			28.6V	14.4V	14.4V	28.6V		14.4V	28.6V
<b>Over-discharge protection</b>	11.0V			22.0V	11.0V	11.0V	22.0V		11.0V	22.0V
<b>Over-discharge recovery volts</b>	12.0V			24.8V	12.0V	12.0V	24.8V		12.0V	24.8V
<b>Controller Self Consumption</b>	<0.5W									
<b>Enclosure Type</b>	Die Cast Aluminum		Polycarbonate		Powder Coat Steel					
<b>Enclosure External Size</b>	11 x 8.5 x 3.5" (279x216x89mm)		17.5 x 12.5 x 6" (445x318x152mm)		24 x 15 x 14" (610 x 381 x 356mm)					
<b>Enclosure Internal Size</b>	10 x 7.75 x 3" (254x197x76mm)		14 x 10 x 5" (356x254x127mm)		23 x 14 x 12" (584 x 356 x 305mm)					
<b>Space available for Customer Electronics</b>	7.75 x 5 x 1.25" (197x127x32mm)		3 x 5 x 3" (76x127x76mm)		12 x 12 x 12" (305 x 305 x 305mm)			3" X 10" X 20" (76 X 254 X 508mm)		
<b>Solar Panel Dims</b>	11" X 9" (279 x 228 mm)	14"X12" (355 x 305mm)	21" X 20" (533 x 508mm)		30" X 27" (762 x 686mm)	61" X 27" (1549 x 686mm)		61" X 54" (1549 x 1372mm)		
<b>Operating Temperature</b>	-30°C to +60°C (-22°F to 140°F)									
<b>System Weight (no batteries)</b>	10lb (4.5kg)		22lb (10kg)		84lb (38kg)	105lb (48kg)		131lb (59kg)		
<b>Battery Weight</b>	5.5lb (2.5kg)		22lb (10kg)		78lb (35kg)			156lb (71kg)		
<b>Wind Speed Rating</b>	110MPH (49m/s)					90MPH (40m/s)				
<b>Warranty</b>	3 Years									



## System Ordering:

Model #	Continuous Power Generation	Enclosure Type	Battery Voltage	PoE Output Voltage	Battery Capacity	Solar Panel Size
RPDC12-9-05	1.25W	Die Cast	12VDC	---	9Ah	5W
RPDC12-9-10	2.5W	Die Cast	12VDC	---	9Ah	10W
RPPL1212-36-30	8W	Polycarbonate	12VDC	12VDC	36Ah	30W
RPPL1218-36-30	8W	Polycarbonate	12VDC	18VDC	36Ah	30W
RPPL1224-36-30	8W	Polycarbonate	12VDC	24VDC	36Ah	30W
RPPL1248-36-30	8W	Polycarbonate	12VDC	48VDC	36Ah	30W
RPPL2424-18-30	8W	Polycarbonate	24VDC	24VDC	18Ah	30W
RPST1212-100-70	17W	Steel	12VDC	12VDC	102Ah	70W
RPST1218-100-70	17W	Steel	12VDC	18VDC	102Ah	70W
RPST1224-100-70	17W	Steel	12VDC	24VDC	102Ah	70W
RPST1248-100-70	17W	Steel	12VDC	48VDC	102Ah	70W
RPST1212-100-140	25W	Steel	12VDC	12VDC	102Ah	140W
RPST1218-100-140	25W	Steel	12VDC	18VDC	102Ah	140W
RPST1224-100-140	25W	Steel	12VDC	24VDC	102Ah	140W
RPST1248-100-140	25W	Steel	12VDC	48VDC	102Ah	140W
RPST2424-50-140	25W	Steel	24VDC	24VDC	51Ah	140W
RPST2448-50-140	25W	Steel	24VDC	48VDC	51Ah	140W
RPST12-200-280	50W	Steel	12VDC	---	204Ah	280W
RPST24-100-280	50W	Steel	24VDC	---	102Ah	280W
RPST2424-100-280	50W	Steel	24VDC	24VDC	102Ah	280W
RPST2448-100-280	50W	Steel	24VDC	48VDC	102Ah	280W

### RPST 12 48-100-70

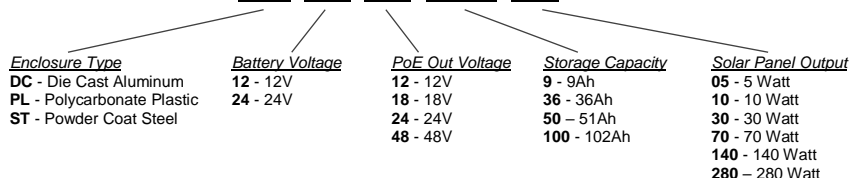

For further information contact:

[Tyconsystems.com](http://Tyconsystems.com)



14641 S 800 W Ste A Bluffdale, UT 84065  
 PH: 801-432-0003 FAX: 801-618-4220